




GE
Lighting

11078 - G15T8

GE T8 - Germicidal

• Germicidal lamps use a special glass that transmits 254nm energy that inactivates bacteria, viruses, molds, and cysts by preventing replication.

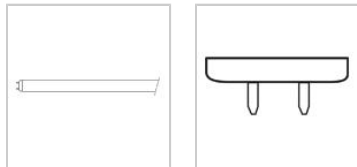

CAUTIONS & WARNINGS

Caution


- Lamp may shatter and cause injury if broken
 - Do not use excessive force when installing lamp.
 - Wear safety glasses and gloves when handling lamp.

Warning

- Lamp emits UV radiation which may cause eye/skin injury. RG-3
 - Avoid exposure of eyes and skin to unshielded lamp.
- Risk of Electric Shock
 - Turn power off before inspection, installation or removal.

GRAPHS & CHARTS

Graphs_Lamp Mortality

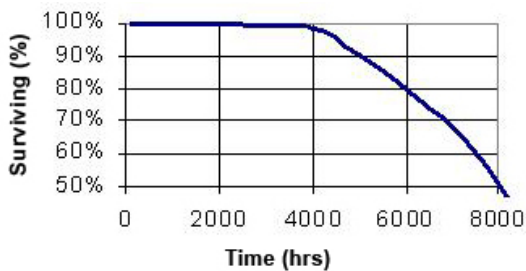

Graphs_Germicidal Effectiveness

GENERAL CHARACTERISTICS

Lamp Type	Linear Fluorescent - Straight Linear
Bulb	T8
Base	Medium Bi-Pin (G13)
Bulb Finish	Clear
Rated Life	7500.0 hrs
Rated Life (instant start) @ Time	7500 h @ 3 h
Bulb Material	UV transmitting glass
Starting Temperature (MIN)	10.0 °C
Primary Application	Germicidal9;Speciality

PHOTOMETRIC CHARACTERISTICS

UVC Output	4.8 W
------------	-------

ELECTRICAL CHARACTERISTICS


Wattage	15.0
Voltage	55.0
Open Circuit Voltage (rapid start) Min @ Temperature	106 V @ 10 °C
Cathode Resistance Ratio - Rh/Rc (MAX)	6.5
Preheat Voltage (MIN)	4.25 V

DIMENSIONS


Maximum Overall Length (MOL)	18.0000 in(457.2 mm)
Minimum Overall Length	17.6700 in(448.8 mm)
Nominal Length	18.000 in(457.2 mm)
Bulb Diameter (DIA) (MIN)	0.940 in(23.9 mm)
Bulb Diameter (DIA) (MAX)	1.100 in(27.9 mm)
Bulb Diameter (DIA)	1.000 in(25.4 mm)
Outside Bulb Diameter (MAX)	1.100 in(27.9 mm)
Max Base Face to Base Face (A)	17.220 in(437.4 mm)
Face to End of Opposing Pin (B) (MIN)	17.400 in(442.0 mm)
Face to End of Opposing Pin (B) (MAX)	17.500 in(444.5 mm)
End of Base Pin to End of Opposite Pin End (C)	17.780 in(451.6 mm)

PRODUCT INFORMATION

Product Code	11078
Description	G15T8
Standard Package	Case
Standard Package GTIN	10043168110782
Standard Package Quantity	24
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	24
UPC	043168110785

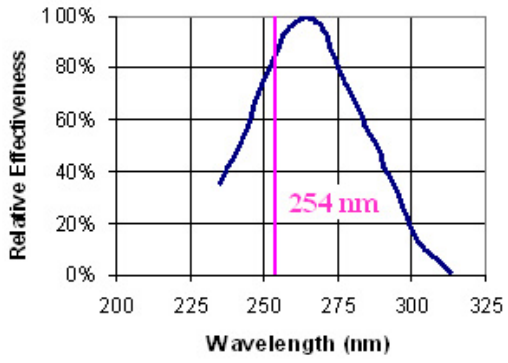

Graphs_Percent Irradiance

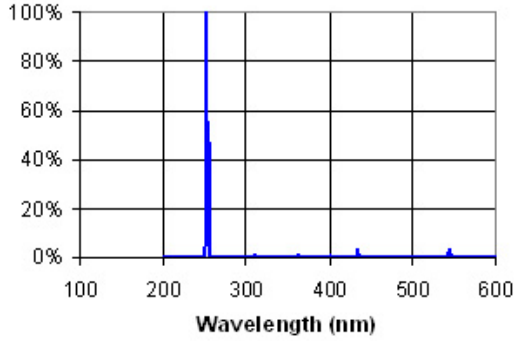

Graphs_UV Maintenance

